



ADA-CDROM-IDE40-DIREKT-REV3-CS



Anschlussadapter für SlimLine CD / DVD Laufwerke zu standard IDE40 / PATA / P-ATA
Kontroller

ES&S Oliver Reiners e.K. · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 1/3
Copyright© 2011

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support


1. Funktionale Beschreibung

Dieser Adapter wurde entwickelt, um SlimLine CD / DVD Laufwerke (z.B. TEAC CD-220E, NEC CD-2800), welche in Notebooks verbaut werden, an den standardisierten IDE Steckverbinder (40 polig 3,5" IDE) anzuschließen. Direkter und platzsparender Anbau an CD / DVD (KX14/15-50).

Die Spannungsversorgung des ADA-CDROM-IDE40-DIREKT-REV3 (Artikelnummer) wird über einen eigenen standardisierten Stecker (4 polig für 3,5" FloppyDisk) realisiert.

- mit MASTER/SLAVE Option druch Lötbrücke
- Lötbrücke CS1 nicht gesetzt
- IDE40 Steckverbinder
- mit Audiooption
- direkt platzierbar
- Inklusive: Abstandshalter, Kunststoff U-Scheiben, Schrauben

2. Bilder

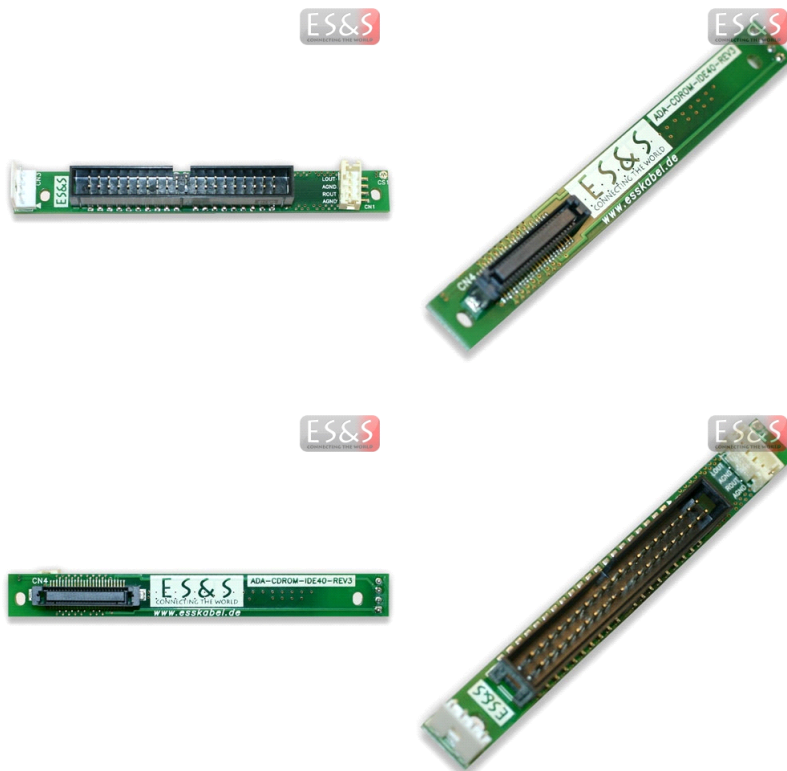

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



DATASHEET

ADA-CDROM-IDE40-DIREKT-REV3-CS

3. Abmessung

Größe: 100,0 (L) x 10,0 (B) x 20,0 (H) (in mm)

4. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

5. Gewicht

Gewicht ohne Verpackung: 12,0 g

Gewicht mit Verpackung: 13,8 g

ADA-CDROM-IDE40-DIREKT-REV3-CS

ES&S Oliver Reiners e.K. · Gewerbering 2 · 41751 Viersen · GERMANY · www.esskabel.de
fon: +49 (0)2162 - 266 18 0 · fax: +49 (0)2162 - 266 18 88 · info@esskabel.de

REV: 1.00 3/3
Copyright© 2011

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

DATASHEET