

ADA-IDE-2.00-2.54-SMART



Adapter für IDE Stecker - 2.00 mm / 2.54 mm

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

1. Funktionale Beschreibung


Der IDE-2.00-2.54-SMART Adapter eignet sich zum Anschluß einer 2.5" (IDE44) Festplatte auf den 3.5" (IDE40) IDE-Bus (PATA).

Das 40-polige IDE Standardkabel (nicht im Lieferumfang enthalten) wird auf die Stiftleiste des Adapters aufgesteckt, damit die 44-polige Buchsenleiste dann mit dem Steckverbinder der 2.5" HDD verbunden werden kann.

Eigenschaften:

- von Raster 2.00 / 44pol. (female) auf Raster 2.54 / 40pol. (male)
- zusätzlich mit 4pol. 5.25" Stromversorgungsanschluss (AMP)
- Kabellänge = 180 mm

2. Bilder

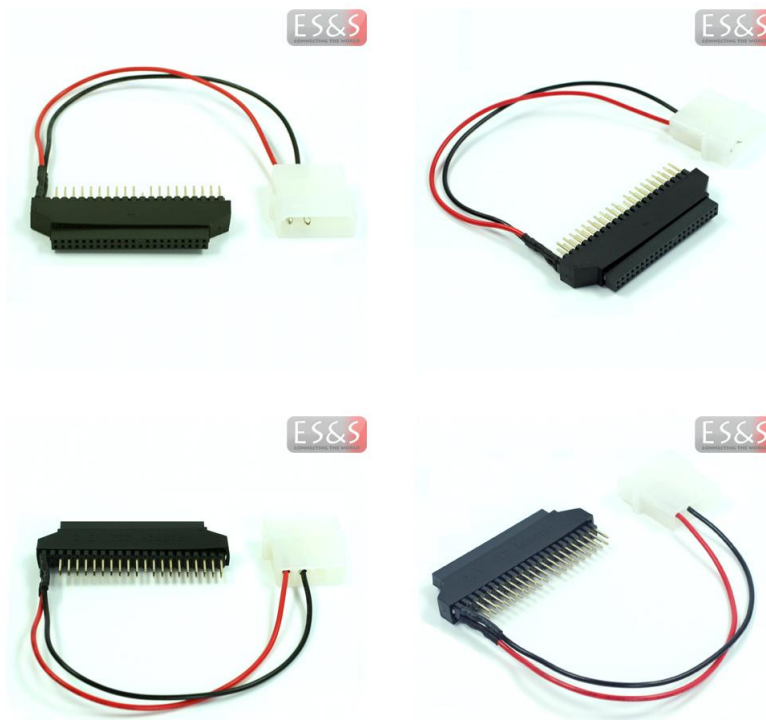

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



DATASHEET

ADA-IDE-2.00-2.54-SMART

3. Abmessung

Größe: 58,4 (L) x 24,2 (B) x 7,1 (H) (in mm)

4. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

5. Gewicht

Gewicht ohne Verpackung: 12,1 g

Gewicht mit Verpackung: 13,5 g

DISCLAIMER:

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support