


# 10116



## Pitch 2.5mm Board In Connectors

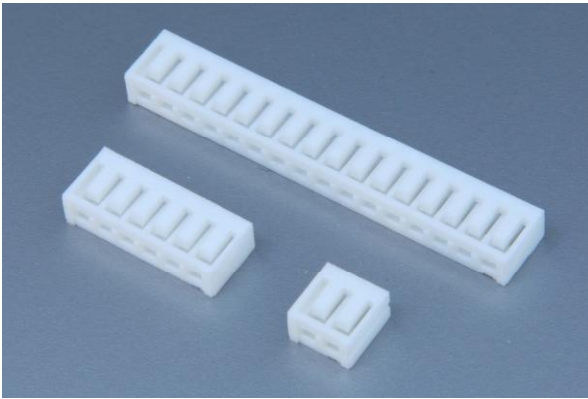

### PERFORMANCE

Electrical Rating: AC/DC 250V 2.5A  
 額定電壓電流  
 Insulation Resistance: 1000MΩ max.  
 絕緣阻抗  
 Withstanding Voltage: 1000V AC/minute  
 耐電壓  
 Temperature Range: -25°C~+85°C  
 適用溫度



### HOUSING

Part No.: P101162~P1011616

產品編號

Material: Nylon 94V-0


材質

Suitable Contact: 10116BS-2





配合端子

Applicable Wire: AWG#22~28

適用電線

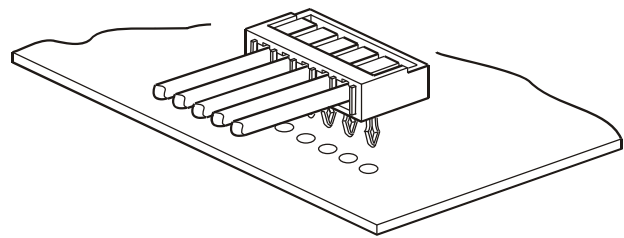

2.5mm

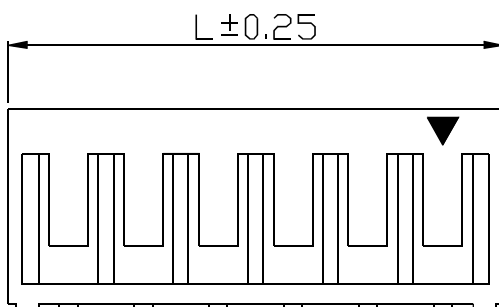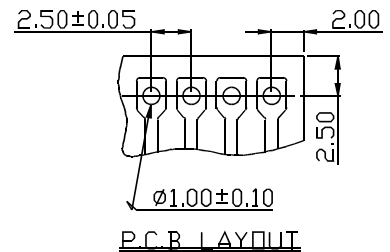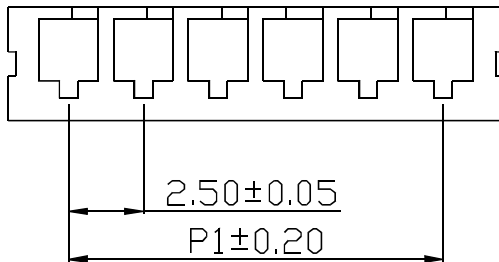

Unit: mm

Part No.	POS.	L	P1	Pack.	Part No.	POS.	L	P1	Pack.
P101162	2	6.50	2.50	1000	P1011610	10	26.50	22.50	1000
P101163	3	9.00	5.00	1000	P1011611	11	29.00	25.00	1000
P101164	4	11.50	7.50	1000	P1011612	12	31.50	27.50	1000
P101165	5	14.00	10.00	1000	P1011613	13	34.00	30.00	1000
P101166	6	16.50	12.50	1000	P1011614	14	36.50	32.50	1000
P101167	7	19.00	15.00	1000	P1011615	15	39.00	35.00	1000
P101168	8	21.50	17.50	1000	P1011616	16	41.50	37.50	1000
P101169	9	24.00	20.00	1000					

Behave in conformity with continual product development policy, SinSheng (STM) reserves the right of specification changing of contents described in this catalogue at any time and without prior notice. Please contact the sales department nearby for most updated information.  
 由於產品持續開發的政策, 信盛(STM)保留隨時變更本目錄所述之規格且不需提前通知的權利。請連繫業務處查詢最新的產品資訊。

# 10116 Board In Side Entry Type Connectors

## TERMINAL

Part No.: 10116BS-2

產品編號

Thickness: 0.20mm

銅板厚度

Material: Brass

材質 黃銅

Surface Treatment: Tin-plated

表面處理 鍍錫

Applicable Wire: AWG# 22-28

適用電線

Insulation O.D.: 1.20~1.60mm

線皮外徑

Suitable Housing: P101162~P1011616

配合塑膠

Suitable PCB Hole:  $\phi 1.0 \pm 0.05$ mm

配合基板孔徑

Thickness: 0.8~1.60mm

厚度

Packing: 10,000PCS(Reel)

包裝數量

## PERFORMANCE

Electrical Rating: AC/DC 250V 2.5A

額定電壓電流

Insulation Resistance: 1000M $\Omega$  max.

絕緣阻抗

Withstanding Voltage: 1000V AC/minute


耐電壓

Temperature Range: -25 $^{\circ}$ C~+85 $^{\circ}$ C

適用溫度



### Side Entry

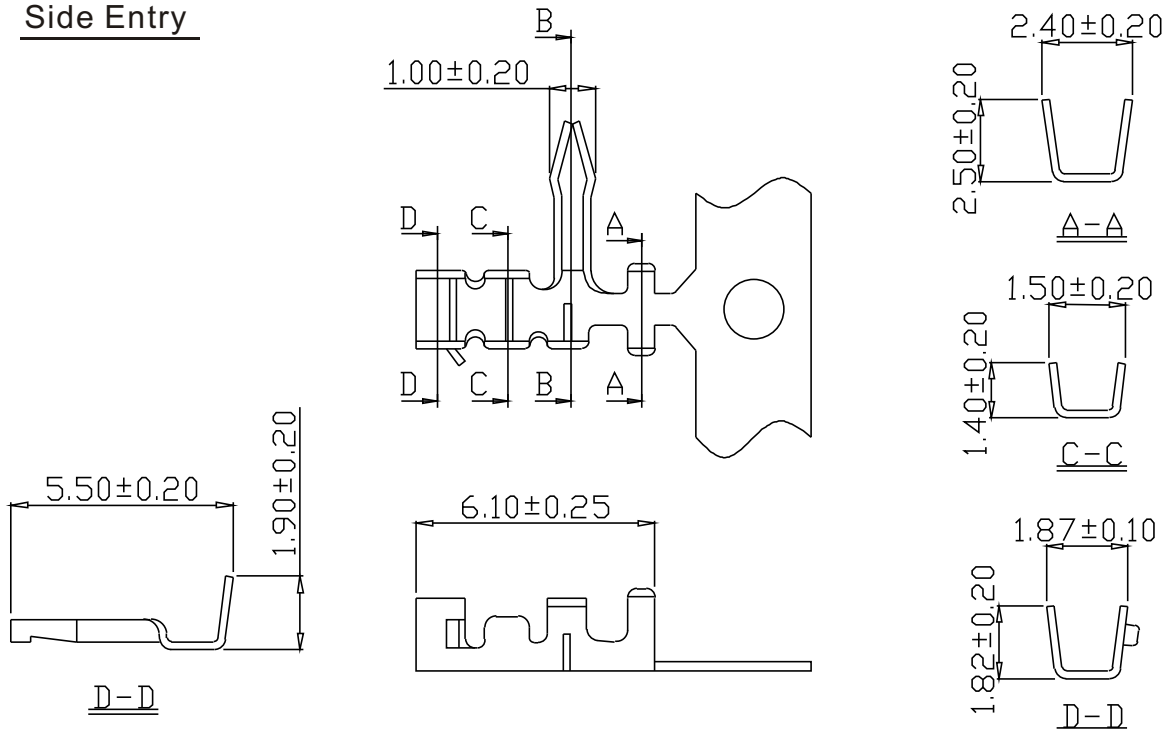

2.5mm