




Pin Assignment																			
CONN.1	1	2	3	4	5	~	~	~	~	~	36	37	38	39	40				
CONN.2	40	39	38	37	36	~	~	~	~	~	5	4	3	2	1				
SIGNAL																			
A.W.G	44	44	44	44	44	44	44	44	44	44	44	44	44	44	44	44	44	44	44
Remark																			

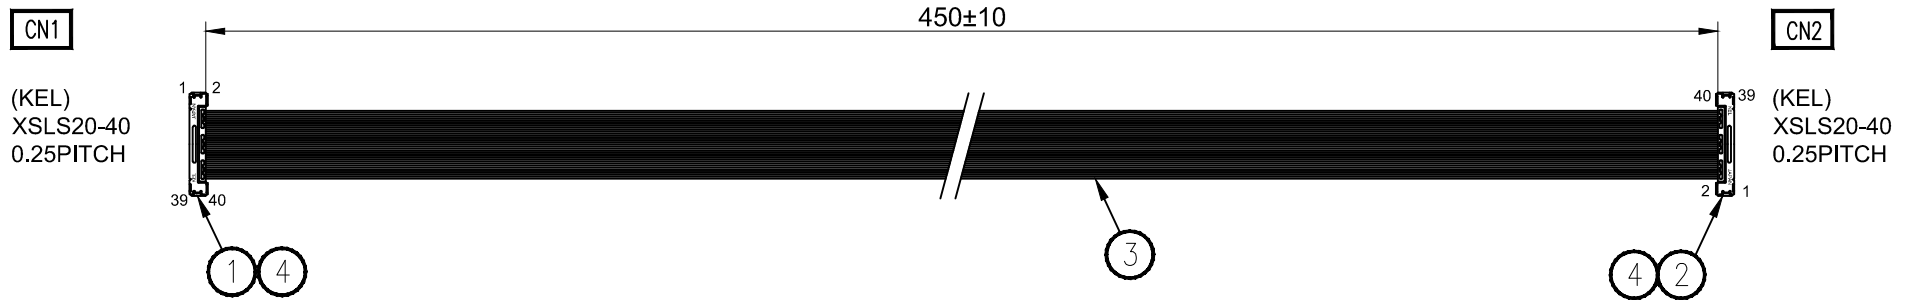

NOTES

- (1) Withstand
 1. Withstand voltage: AC100 V
 2. Cut-off current: 1mA
 3. Withstand time: 0.5sec/point
- (2) Insulation
 1. Insulation voltage: DC100 V
 2. Insulation resistance: 20MΩ
 3. Insulation time: 1.0 sec/point



Unit : mm(inch)

NO.	Component	Quantity	Part name	Maker	Remark
4	UV	4	UV	Comparable	Color:
3	Cable	40	Micro Coaxial Cable 44AWG-PFA	Comparable	Color:
2	Connector	1	XSLS20-40	KEL	
1	Connector	1	XSLS20-40	KEL	

△					
△	2020.06.10				
	REV DATE.				
⊙	THIRD ANGLE PROJECTION	DRAWN BY	DATE	CHECKED BY	DATE
			2020.06.10		2020.06.10
				APPROVED BY	DATE
					2020.06.10
					SCALE 1:1
	MATERIAL	CONTACT OIL		GENERAL TOLERANCE	
				x. ±2.0 x. ±1.0 .xx±0.5	
	REMARK	TITLE		DRAWING No.	SHEET
		KAB-KEL-XSLS20-40-045-C		P24633	1/1
					REVISION
					B